LPOSRV2K-M28

先导溢流阀 (带反向单向阀功能)

说明 DESCRIPTION

A pilot-operated pressure limitation and feed valve with external drain port.

带反向单向阀、外泄口型先导座 阀式溢流阀

工作 **OPERATION**The valve prevents fl

The valve prevents flow from 1 to 2 until pressure at 1 exceeds the set crack pressure and opens the pilot section. The pilot flow creates a pressure differential across the poppet which causes the valve to open allowing flow from 1 to 2 protecting the circuit from over pressurization.

If the pressure at ② is at least 2 bar higher than Pressure at ①. The main poppet will be lifted out of its seat, to allow flow from ② to ①, this feed function is used to make up for lacking hydraulic fluid volumes.

Pressure at port ③ is directly additive to the valve setting at a 1:1 ratio and should not exceed 50bar.

阀体①口和②口不通,直到①口压力超过设定压力且打开先导阀芯。这样,先导阀芯引起主阀芯两端压力差的变化,压力差达到一定时,①口和②口互通。当②口的压力比①口压力高出 2.0bar 以上时,②到①打开,油液从②流向①,补油功能通常在系统中液压油不足时进行补充。

油口③的压力直接 1:1 叠加到溢流阀设定值上,并且不能超过 50bar。

SYMBOL




技术参数 SPECIFICATIONS


最大工作压力 (Max. Operating Pressure):			420bar
最大流量 (Max. F	low) :		200 L/min
内泄漏 (Internal L	_eakage):	10 drops/min. (10	D滴/分) max. to 80% of nominal setting
温度 (Temperatu	re):		-40°F to +250°F(-40°C to +120°C)
过滤 (Filtration):			See Page (参见) N-1
油液 (Fluids):	Mineral-ba	ased fluids with visc	osities of 7.4 to 420 cSt. (矿物油粘度)
插孔 (Cavity):			Rexroth-HC, See page M-27

阀块材料 (Body Material):

Steel & Ductile iron rated to 350bar 钢和球铁允许使用最大压力350bar

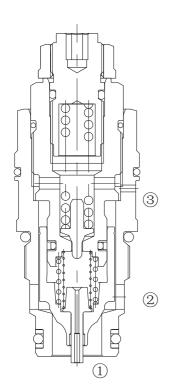

压力 - 流量曲线 PRESSURE DROP VS.FLOW

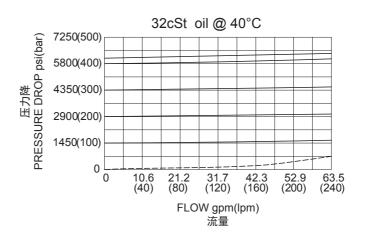



订货代号 TO ORDER

LPOSRV2 K - M28 - * * / **** - * *


- 1 功能 LPOSRV2= 先导式溢流阀 Adjutable Pilot-Operated Cartridge Relief Valve
- 2 外泄口 External Drain Port
- 3 规格 Size M28=M28 规格

- 4 压力范围 Spring Ranges 60=1450-6090psi(100-420bar) Preset:3600psi(250bar)
- 5 设定压力 Settings In Bar 空白 Blank= 预设定 Preset:1885psi(130bar) 例 Example:0200=200bar
- 6 阀块油口 Body Porting 空白 Blank= 不带阀块 None 10T=SAE10 6G=G 3/4

其它螺纹油口也是可选择的 Other Porting is Available

安装尺寸 INSTALLATION DIMENSIONS

Unit=Millimeters

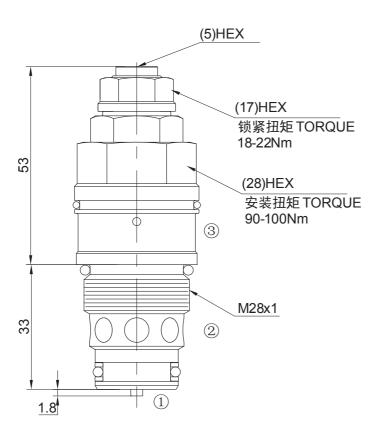

Ī